

PRODUCT DATASHEET

All PC+IP65 Linear Light HYD-T10-40W 6000K



Application

- Tunnel
- Parking lot
- Factory
- Petrochemical working areas

Benefit

- Flicker free
- Protection against water and dust, IP65
- High light transmission mask, soft light, flicker free
- The professional sealing design ensures the stability and safety of the lamps

Feature



- Clear PC Lenses
 - Warranty 3 years
 - Easy and quick installation
 - It has excellent oxidation resistance, wear resistance
-

Electrical Data

Nominal wattage (W)	40W
Nominal Voltage (V)	220-240 V
Mains Frequency (Hz)	50/60 Hz
Nominal Current (mA)	180
LED Driver Current (mA)	1050
LED Driver Voltage (Vdc)	33-40
LED Driver Efficiency (%)	88%
Power Factor λ	0.95
Total harmonic distortion (%)	<20%
Operating mode	Built in LED driver

Photometrical data


Luminous flux $\pm 10\%$ (lm)	4040 lm
Luminous efficacy	104 lm/w
Color temperature	6000K
Light color (designation)	Cold White
Color rendering index Ra	≥ 80
Standard deviation of color matching	≤ 5 SDCM
Luminous intensity/cd	1146
Flickering	Flicker free
Beam angle	129 °

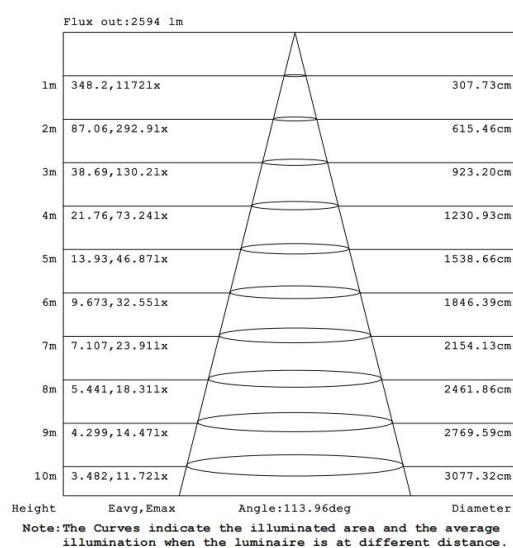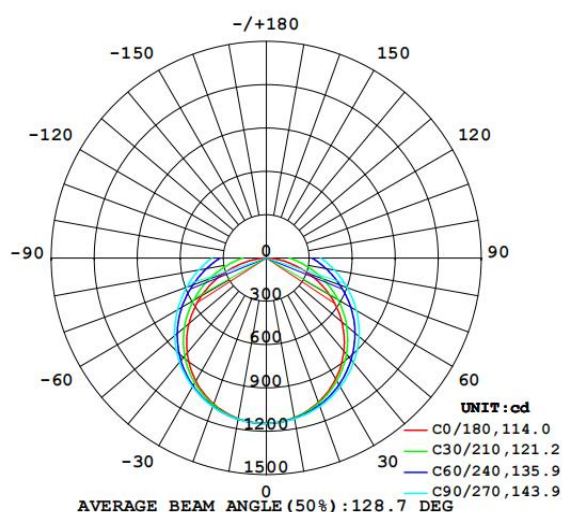

6000K

Dimensions & Weight

Length&Width (mm)	1225*63.7
Height (mm)	63.7
Product weight (g)	...

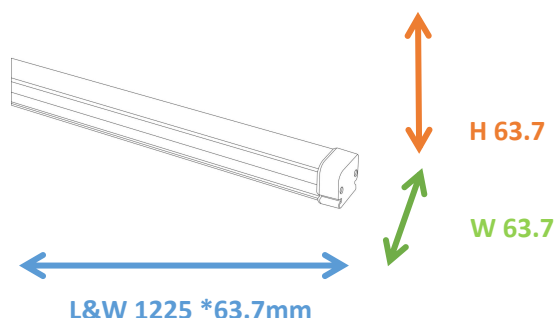

Material & Colors

Product color	All White
Housing color	White
Body material	PC
Cover material	PC
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-10°C - +45 °C
Temperature range at storage	-10°C - +45 °C
Type of connection	Screw terminal
Type of protection	IP65
Dimmable	No
Mounting type	Surface mounted
Mounting location	Ceiling
Application environment	Indoor/Outdoor
Cut size (mm)	No
LED module replaceable	Not replaceable
With light source	Yes

Certificates & Lifespan

Life (h)	30,000
Certificates	CB CE LVD EMC
Standards	ISO9001:2015

Logistical Data

Product code	Dimensions (L*W*H)	Pcs/ carton	G.W. kg	Volume CBM
HYD-T10-40W	127*16*37.5 cm	10	11.7	0.07620


Installation Method

INSTALLATION

- ① Fix the 2 bracket on the ceiling with the screws



- ② Clip the light for connecting lines into the bracket and complete the installation

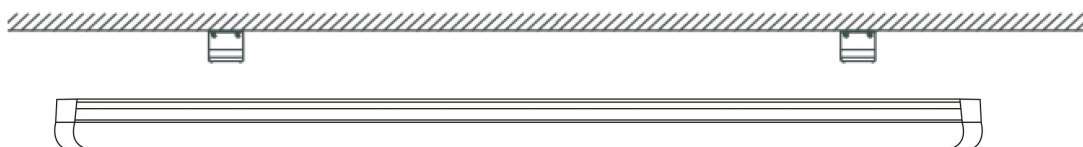

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.