

PRODUCT DATASHEET

Fine workmanship Die-cast aluminum Linear Light HYD-T19-40W 3000K



Application

- Office
- School
- Corridor
- Meeting room
- Shop

Benefits

- Flicker free
- Brand driven, high stability, safe and efficient
- Linear lamp body to achieve geometric design, free splicing, decorating space
- High-brightness LED lamp beads, combined with the heat-dissipating aluminum lamp body, it can reduce light decay and extend the service life

Features



- Clear PC Lenses
- Warranty 5 years
- Easy and quick installation
- Die-cast aluminum body for better heat dissipation, anti-corrosion

Electrical Data

Nominal wattage (W)	40W
Nominal Voltage (V)	220-240 V
Mains Frequency (Hz)	50/60 Hz
Nominal Current (mA)	175
LED Driver Current (mA)	1050
LED Driver Voltage (Vdc)	15-38
LED Driver Efficiency (%)	90%
Power Factor λ	0.95
Total harmonic distortion (%)	<10%
Operating mode	Built in LED driver

Photometrical data


Luminous flux $\pm 10\%$ (lm)	2906 lm
Luminous efficacy	74 lm/w
Color temperature	3000K
Light color (designation)	Warm White
Color rendering index Ra	≥ 80
Standard deviation of color matching	≤ 5 SDCM
Luminous intensity/cd	1152
Flickering	Flicker free
Beam angle	106 °

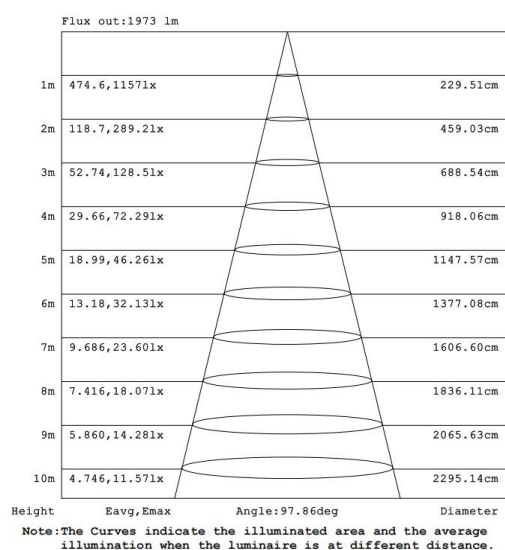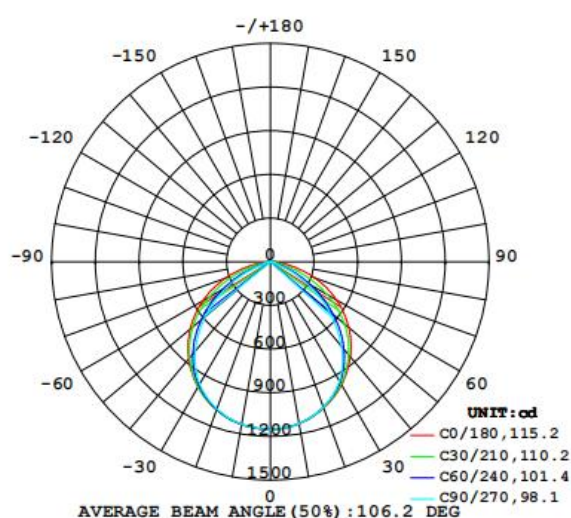

3000K

Dimensions & Weight

Length&Width (mm)	1200*50
Height (mm)	75
Product weight (g)	1752

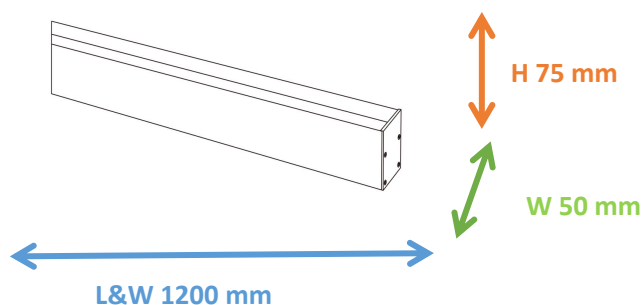

Material & Colors

Product color	All White
Housing color	White
Body material	Aluminum
Cover material	PC
Reflector color	White
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-10°C - +45 °C
Temperature range at storage	-10°C - +45 °C
Type of connection	Screw terminal
Type of protection	IP20
Dimmable	No
Mounting type	Surface mounted
Mounting location	Ceiling
Application environment	Indoor
Cut size (mm)	No
LED module replaceable	Not replaceable
With light source	Yes


Certificates & Lifespan

Life (h)	50,000
Certificates	CB CE LVD EMC
Standards	ISO9001:2015

Logistical Data

Product code	Dimensions (L*W*H)	Pcs/ carton	G.W. kg	Volume CBM
HYD-T19-40W	126*19*32.5 cm	10	20.1	0.07781

Installation Method

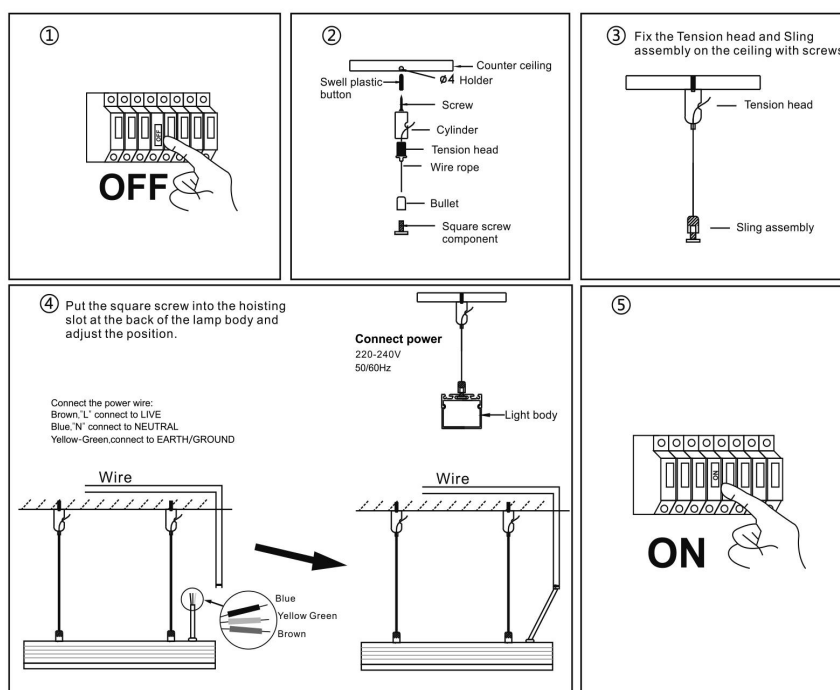

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.